

11/08/99 11/08/99 11/08/99

A

☒ "Express Mail" mailing label No. EI118830672US Date of Deposit 11-8-99

I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

James M. Kubik and Carolyn S. Dute
(Mailer)

PATENT APPLICATION TRANSMITTAL FORM

DOCKET NO. (Optional)
591-99-023

11/08/99
09/435570
U.S. PTO

To the Assistant Commissioner for Patents:

Transmitted herewith for filing is the patent application of James M. Kubik and Carolyn S. Dute

Entitled Non-Metallic, Snap-Together Subassembly of Internal Double Check Valve

Enclosed are:

- ☒ Three (3) sheets of drawings. (informal)
- ☒ an assignment of the invention to: AlliedSignal Truck Brake Systems Company
- ☒ executed declaration of the inventors.
- ☐ a certified copy of a _____ application.
- ☐ associate power of attorney.
- ☐ a verified statement to establish small entity status under 37 CFR 1.9 and 1.27.
- ☐ information disclosure statement, PTO 1449, _____ References
- ☐ preliminary amendment.
- ☐ other: _____

	NUMBER FILED	NUMBER EXTRA	RATE	FEE
BASIC FEE			\$ 760.00	\$ 760.00
TOTAL CLAIMS	20 - 11 =	0	\$ 22.00	0.00
INDEPENDENT CLAIMS	=		\$ 78.00	0.00
MULTIPLE DEPENDENT CLAIM PRESENT				
*NUMBER EXTRA MUST BE ZERO OR LARGER			TOTAL	760.00

- ☐ A check in the amount of \$ _____ to cover the filing fee is enclosed.
- ☒ The Assistant Commissioner is hereby authorized to charge and credit Deposit Account No. 01-1125 as described below. I have enclosed a duplicate copy of this sheet.
- ☒ Charge the amount of \$ 760.00 as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 CFR 1.16 and 1.17.

11/8/99
Date

Paul L. Marshall
Signature

AlliedSignal Truck Brake Systems Company
901 Cleveland Street
Elyria, Ohio 44035

Paul L. Marshall
Attorney Name
31,178
Reg. Number
248-362-7053
Phone

**NON-METALLIC, SNAP-TOGETHER SUBSSEMBLY
OF INTERNAL DOUBLE CHECK VALVE**

5

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

10 This invention generally pertains to an air brake system, and more particularly a proportioning valve incorporating a double check valve, as used in an air brake system. It will be appreciated, however, that the invention may have broader applications and may be advantageously employed in related valve environments or braking applications.

15

DESCRIPTION OF RELATED ART

20 A conventional brake proportioning assembly includes a housing or body having a blind end bore that receives a valve assembly. In the prior art, a spring, a nylon disk/spring follower, and a check valve of the valve assembly are inserted and manually held in place. The subassembly is inserted into the blind bore of the housing. The individual parts or components of the valve assembly are inadequately controlled and maintained in the proper orientation. Oftentimes, it is not until the assembled valve is subsequently subjected to a pneumatic test that assembly problems are noticed.

25

30 Moreover, air flow control through the valve assembly is restricted. The dimensioning of the metal valve element restricts the size and number of openings that could be formed from machining operations. Although complex passages can be machined into the metal valve member, such machining ultimately makes the valve manufacturing cost prohibitive and still may not achieve the desired increase in air flow or improved flow profiles.

35

With conventional metal valve assemblies, only a limited amount of identifying indicia is provided on the valve components. It is desirable, however, and a goal of effective

quality control procedure, to convey or record an increased amount of information on the valve itself without substantially increasing the cost to manufacture the valve assembly.

SUMMARY OF THE INVENTION

The present invention provides a non-metallic, snap-together subassembly that eliminates potential operator assembly problems and improves the air flow and flow profiles through the valve assembly.

More particularly, the valve assembly includes a valve housing having a bore that receives the valve member therein. The valve member includes a first portion having internal passages formed therein. A second portion of the valve assembly is snap-fit, or interference fit, to the first portion. The first and second portions contain a check valve assembly that includes a spring, spring follower, and valve member.

The passages or openings in the first portion are enlarged to enhance air flow through the valve assembly.

A primary benefit of the invention resides in the ability to reliably assemble distinct, separate valve components.

Another benefit of the invention relates to the low cost associated with manufacture and assembly, while maintaining reliable performance.

Still another benefit of the invention resides in the increased information that may be provided on the valve for quality control purposes.

Still other features and benefits of the invention will become apparent to those skilled in the art upon a reading and understanding of the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention may take physical form in various parts and arrangements of parts, a preferred embodiment of which will

be described in detail in the specification. The drawings include:

FIGURE 1 which is a longitudinal, cross-sectional view through the valve assembly;

FIGURE 2 which is an exploded perspective view of the five part subassembly in accordance with the present invention;

FIGURE 3 which is a perspective view of an underside of a second or cap portion of the valve assembly;

FIGURE 4 which is a perspective view of the opposite end of the cap portion;

FIGURE 5 which is a plan view of a first end of the first valve portion;

FIGURE 6 which is a cross-sectional view taken generally along the lines 6-6 of FIGURE 5;

FIGURE 7 which is a cross-sectional view taken generally along the lines 7-7 of FIGURE 5; and

FIGURE 8 which is a cross-sectional view taken generally along the lines 8-8 of FIGURE 5.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIGURE 1 illustrates a preferred embodiment of the present invention in which a valve A which includes a valve housing or body B and a valve assembly C. The preferred arrangement is a proportional valve employing a double check valve arrangement as used in a truck brake system (not shown). Since the truck brake system and the use of a proportioning valve employing the double check valve are well known in the industry, further discussion herein is deemed unnecessary to a full and complete understanding of the present invention.

This type of conventional housing or valve body has a blind ended passage or bore 10 with multiple counter-bores adapted to receive the valve assembly. In particular, the

internal check valve arrangement requires an enlarged counter-bore assembly. Thus, and as shown in FIGURE 1, the bore 10 has a first counter-bore 12 extending axially outward therefrom, and a second counter-bore 14 of slightly larger diameter extending axially outward from the first counter-bore. As will be appreciated, and as shown in this FIGURE, additional counter-bores 16, 18 can be provided to accommodate the remainder of the valve assembly.

FIGURE 2 is an exploded view of the valve assembly C removed from the housing. The valve assembly includes a first valve member portion 30 that is an elongated generally cylindrical structure. It has a pair of circumferentially continuous and radially raised lands 32 disposed adjacent a first end that define a groove 34 therebetween adapted to receive a first seal ring, such as O-ring 36. The O-ring is dimensioned for receipt in and adapted for sliding, sealing engagement with the bore 10. Similarly, lands 40 define a seal member receiving groove 42 that receives seal member or O-ring 44 that is dimensioned for sliding, sealing engagement in the counter-bore 12 and, likewise, a third series of axially spaced lands 50 define a groove 52 that receives the O-ring 54 for sliding, sealing engagement in the counter-bore 14.

Internal passages 56 are formed in the first valve member portion 30. These passages communicate with a check-valve assembly 60, which is of generally conventional structure, to selectively prevent and allow air flow through the passages. The check valve is best illustrated in FIGURE 2 and includes three main components, including a biasing means or spring 62, a spring follower or spring locator 64, and an elastomeric or rubber valve

member 66. The valve member 66 is adapted to selectively engage the open end of the passage 56 under the influence of air pressure. The air pressure overcomes the bias of the spring which prevents communication between the internal passages 56 and the remainder of the valve subassembly shown at the right-hand end of the valve assembly in FIGURE 1.

The check valve assembly 60 is maintained in place by a second valve portion or cap 70. The cap is of annular configuration and on its external periphery includes a groove 72 that receives the sealing O-ring 74 that also slidably engages the counter-bore 14. A central or through passage 76 is defined through the cap to allow air flow to communicate with one face of the check valve member 66. Thus, and as best appreciated in Figure 1, the cap has a peripheral dimension substantially identical to the second end of the first valve portion 30 so that when disposed in abutting relation with the first valve portion, the assembled valve portions 30, 70 are substantially similar in external profile to the prior art, conventional metal valve assembly.

Of importance in the present arrangement is a radial inner shoulder 78 that encloses or retains the check valve assembly 60 within the two-part valve member 30, 70. As referenced above, in the prior arrangement, the check valve assembly was inserted into the bore and counter-bore portion of the housing without any ability to assure retention. The present invention, however, assures that the cap portion 70 defines a friction fit with the first valve portion 30. This is achieved via radially raised protrusions 80 that form an interference fit with a counter-bore 82 in the enlarged end of the first valve portion. The spring 62, spring locator 64, and check valve 66 can be positioned

within the first valve portion and over the right-hand end of the passage 56. Thereafter, the cap is brought into frictional engagement with the first valve portion via the cooperating surfaces 80, 82. In this manner, a discrete sub-assembly is

5 formed outside of and prior to insertion into the first valve portion, and the assembler can be assured that the components will be retained in the proper relationship as the sub-assembly is inserted into the bore of the valve housing.

In the preferred arrangement, the first and second valve

10 portions 30, 70 are formed from a plastic, such as a glass filled acetal. This is just one preferred non-metallic material because of its ability to withstand contaminants associated with an air brake system, such as brake fluid, hydrochloric acid, hydraulic fluids such as power steering fluids, etc. The prior art

15 arrangement is not as desirable because of the costs associated with a machined metal valve that receives the check valve assembly, in addition to the handling and assembly difficulties noted above. The cap portion, disk, or similar closure member at the right-hand end of the valve assembly simply cannot be secured

20 in an inexpensive manner to the remainder of the valve.

By forming the valve portion from a plastic material, the components can be easily molded. Sidewall thicknesses can be closely controlled which results in closely controlled curing or cooling of the plastic upon removal from the mold so that

25 warping, shrinking, and the like does not occur. The passages 56 extending through the valve portion can be non-circular (FIGURES 5-8) to increase air flow and also improve air flow profiles through the subassembly. For example, a central bore 56 intersects with cross bore 90. Both of these are illustrated as

30 having circular cross-sections, although other cross-sectional configurations may be used without departing from the scope and intent of the present invention. On the other hand, longitudinal

passages 92a-d are generally truncated pie-shaped portions that are evenly spaced in a circumferential direction. These passages can be substantially larger than conventional or traditional circular bores to improve air flow or delivery through the valve assembly. Although it is understood that machining a metal element could also achieve intricate passageways, the cost associated with such machining, and the complexity thereof, simply makes such options unacceptable from a manufacturing cost standpoint.

The non-metallic, moldable material also allows a wider range of informational indicia to be formed directly in the molded component. For example, the cavity number, date code, and part number associated with the particular valve can be easily formed in the component. This should be contrasted with the conventional aluminum parts where, although selected information may be available by stamping it on the component, the high cost of metal stamping essentially precluded the inclusion of anything but the most basic of information.

The O-rings 36, 44, 54 are received in the respective grooves and coated with a silicon grease before insertion into the blind opening. The two molded plastic parts serve as a less expensive replacement for the turned aluminum parts. Moreover, since the parts are molded, design features present themselves that were not otherwise commercially feasible with the metal.

Uniform wall sections were used. This assures good plastic flow and is essential to minimizing porosity during curing of the material. Alignment pins are molded into the individual components so that the check valve member, spring, and spring follower could easily be captured within the cavity formed by the mating of the two plastic valve portions together. With a minimal force, the assembly is snapped together, ultimately creating a single sub-assembly from the individual five components. Once the seal rings are coated with the silicon

grease, the entire sub-assembly is simply inserted into the blind opening, and there is an increased assurance of guaranteeing a proper assembly.

- 5 The invention has been described with reference to the preferred embodiment. Obviously, modifications and alterations will occur to others upon a reading and understanding of this specification. It is intended to include all such modifications and alterations in so far as they come within the scope of the appended claims or the equivalents thereof.

SECRET 0455460

Having thus described the invention, what is claimed is:

1. A valve assembly for an air brake system comprising:

a valve housing having a bore;

5 a valve member received in the bore having a first portion and a second portion forming an interference fit with the first portion; and

a check valve assembly interposed between the first and second portions and maintained in an assembled state within the first and second portions, the check valve assembly including a
10 biasing member, a follower, and a check valve member.

2. The valve assembly of claim 1 wherein the first portion includes a recess and the second portion included protrusions
15 extending therefrom and received in a friction fit engagement with the recess.

3. The valve assembly of claim 1 wherein the first portion of the valve member is formed from a non-metallic material.
20

4. The valve assembly of claim 1 wherein the second portion of the valve member is formed from a non-metallic material.

25 5. The valve assembly of claim 1 wherein the first portion of the valve member is formed from a non-metallic material and non-circular passages are provided therethrough to enhance flow.

30 6. A proportioning valve assembly comprising:
a housing having a blind opening formed therein;
a valve assembly dimensioned for receipt in the opening, the valve assembly including a first portion formed from a non-metallic material having at least one passage extending

therethrough and having a recess formed at an open end thereof,
and a second portion formed from a non-metallic material and
including a surface dimensioned for interference fit with the
recess, and a check valve assembly received within the first and
5 second portions including a spring, a spring follower, and a
valve member disposed in abutting engagement within the first and
second portions whereby the valve assembly is maintained in
assembled arrangement by the interference fit between the first
and second portions allowing the valve assembly to be easily
10 inserted into the blind opening.

7. The assembly of claim 6 wherein the second portion
includes raised protrusions disposed in spaced relation along the
first portion for frictional engagement with the recess.

8. The assembly of claim 7 wherein the second portion
includes a circumferentially continuous shoulder dimensioned for
receipt in the recess.

9. A method of assembling a proportioning valve assembly
having a housing with a blind opening therein, comprising the
steps of:

providing a first non-metallic valve member portion
having an open end defining a recess;

providing a second non-metallic valve member portion
having a shoulder dimensioned for receipt in the recess of the
first portion;

inserting a check valve assembly between the valve
member first and second portions; and

frictionally engaging the shoulder in the recess to
encase the check valve member between the first and second valve
member portions and define a sub-assembly.

11. The method of claim 9 including the steps of placing
5 the check valve assembly into a cavity in the second valve member
portion and advancing the first and second portions toward one
another prior to the frictional engagement step.


Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	1.2	0.4	0	2
Marital status	1.5	0.5	0	3
Education	12.5	1.5	9	16
Income	15.2	3.5	10	25
Occupation	1.8	0.8	0	4
Health status	1.2	0.4	0	2
Stress level	2.5	1.2	1	5
Life satisfaction	3.8	1.5	1	6
Resilience	4.2	1.8	1	7
Optimism	4.5	1.5	1	7
Gratitude	4.8	1.2	1	7
Forgiveness	5.2	1.5	1	7
Empathy	5.5	1.2	1	7
Compassion	5.8	1.5	1	7
Kindness	6.2	1.2	1	7
Generosity	6.5	1.5	1	7
Patience	6.8	1.2	1	7
Self-control	7.2	1.5	1	7
Perseverance	7.5	1.2	1	7
Determination	7.8	1.5	1	7
Confidence	8.2	1.2	1	7
Trust	8.5	1.5	1	7
Cooperation	8.8	1.2	1	7
Teamwork	9.2	1.5	1	7
Leadership	9.5	1.2	1	7
Influence	9.8	1.5	1	7
Power	10.2	1.2	1	7
Authority	10.5	1.5	1	7
Control	10.8	1.2	1	7
Management	11.2	1.5	1	7
Organization	11.5	1.2	1	7
Planning	11.8	1.5	1	7
Execution	12.2	1.2	1	7
Completion	12.5	1.5	1	7
Success	12.8	1.2	1	7
Achievement	13.2	1.5	1	7
Progress	13.5	1.2	1	7
Growth	13.8	1.5	1	7
Development	14.2	1.2	1	7
Improvement	14.5	1.5	1	7
Advancement	14.8	1.2	1	7
Elevation	15.2	1.5	1	7
Ascension	15.5	1.2	1	7
Exaltation	15.8	1.5	1	7
Ennoblement	16.2	1.2	1	7
Exaltation	16.5	1.5	1	7
Exaltation	16.8	1.2	1	7
Exaltation	17.2	1.5	1	7
Exaltation	17.5	1.2	1	7
Exaltation	17.8	1.5	1	7
Exaltation	18.2	1.2	1	7
Exaltation	18.5	1.5	1	7
Exaltation	18.8	1.2	1	7
Exaltation	19.2	1.5	1	7
Exaltation	19.5	1.2	1	7
Exaltation	19.8	1.5	1	7
Exaltation	20.2	1.2	1	7
Exaltation	20.5	1.5	1	7
Exaltation	20.8	1.2	1	7
Exaltation	21.2	1.5	1	7
Exaltation	21.5	1.2	1	7
Exaltation	21.8	1.5	1	7
Exaltation	22.2	1.2	1	7
Exaltation	22.5	1.5	1	7
Exaltation	22.8	1.2	1	7
Exaltation	23.2	1.5	1	7
Exaltation	23.5	1.2	1	7
Exaltation	23.8	1.5	1	7
Exaltation	24.2	1.2	1	7
Exaltation	24.5	1.5	1	7
Exaltation	24.8	1.2	1	7
Exaltation	25.2	1.5	1	7
Exaltation	25.5	1.2	1	7
Exaltation	25.8	1.5	1	7
Exaltation	26.2	1.2	1	7
Exaltation	26.5	1.5	1	7
Exaltation	26.8	1.2	1	7
Exaltation	27.2	1.5	1	7
Exaltation	27.5	1.2	1	7
Exaltation	27.8	1.5	1	7
Exaltation	28.2	1.2	1	7
Exaltation	28.5	1.5	1	7
Exaltation	28.8	1.2	1	7

5

10

15

ADZ20030.DOC

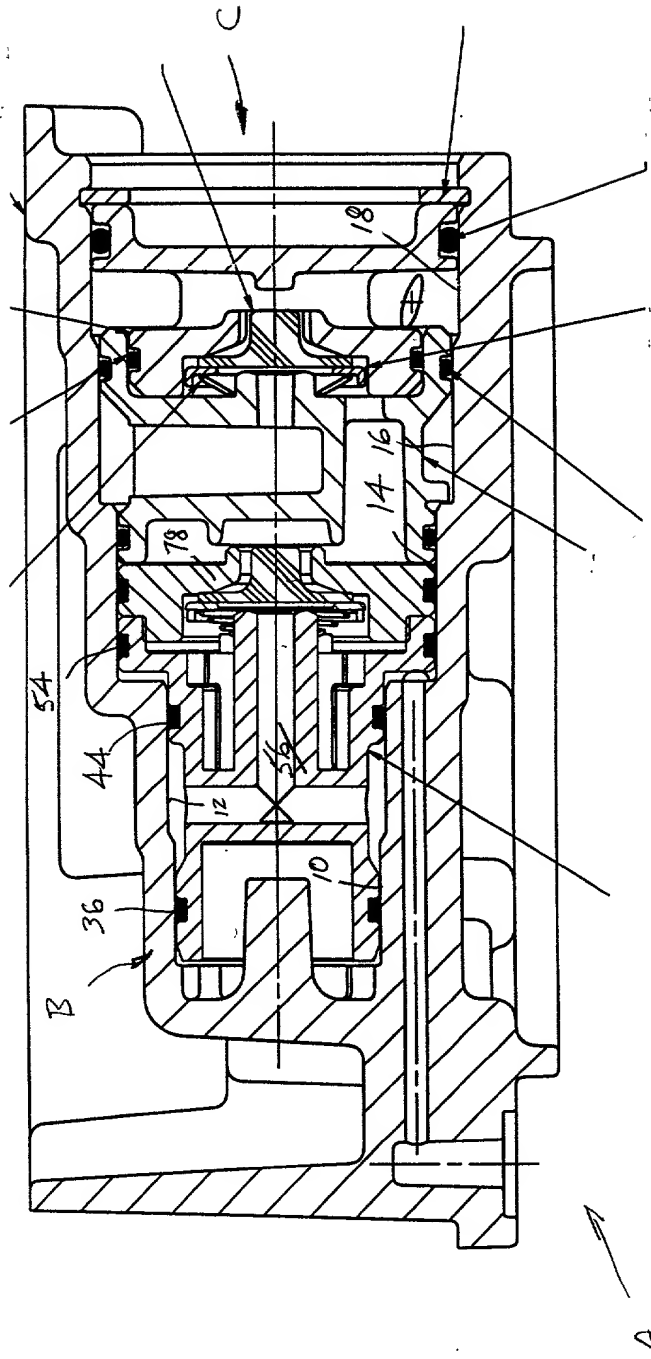

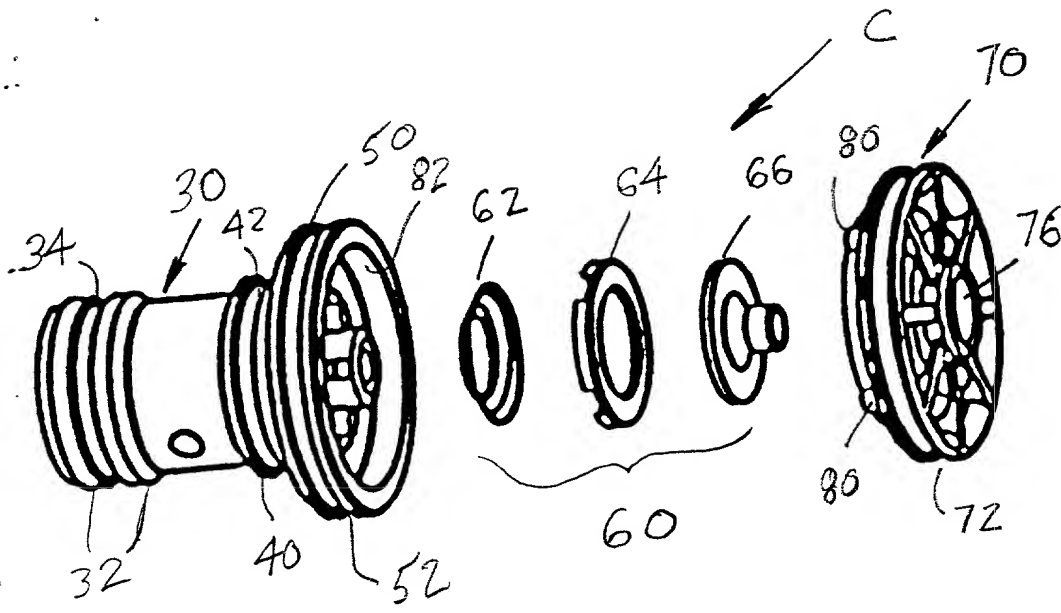


FIG. 2

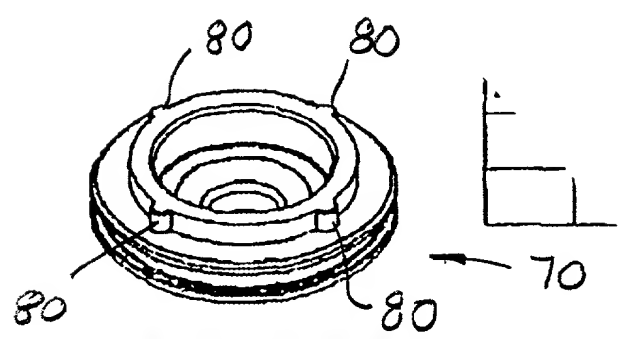


FIG. 3

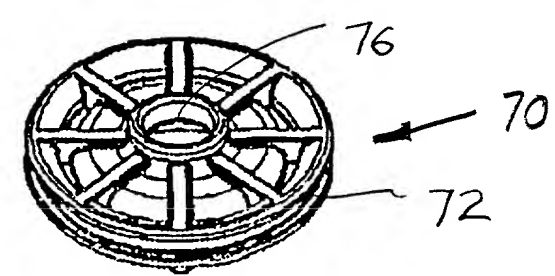


FIG. 4

668017-0/55E460

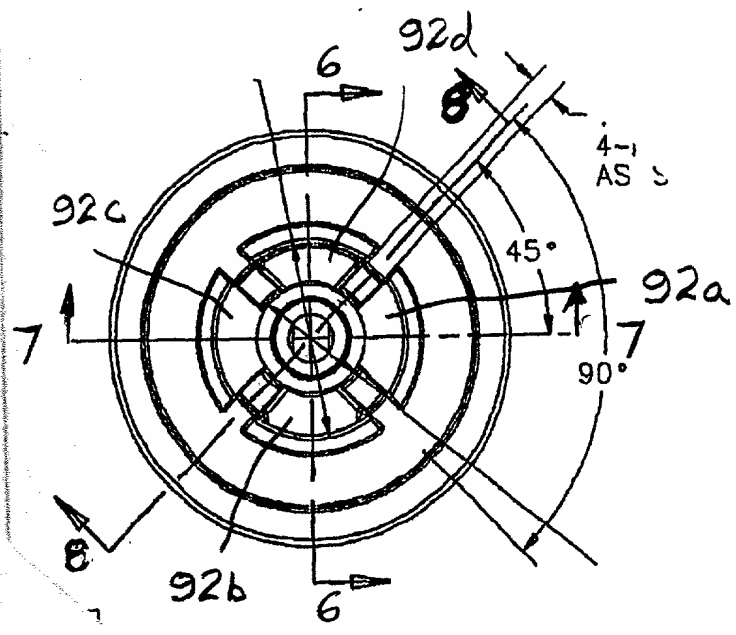


FIG. 5

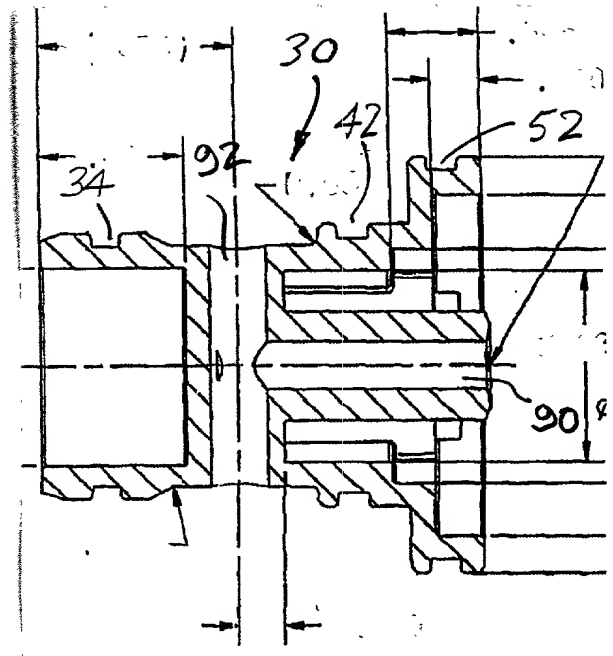


FIG. 6

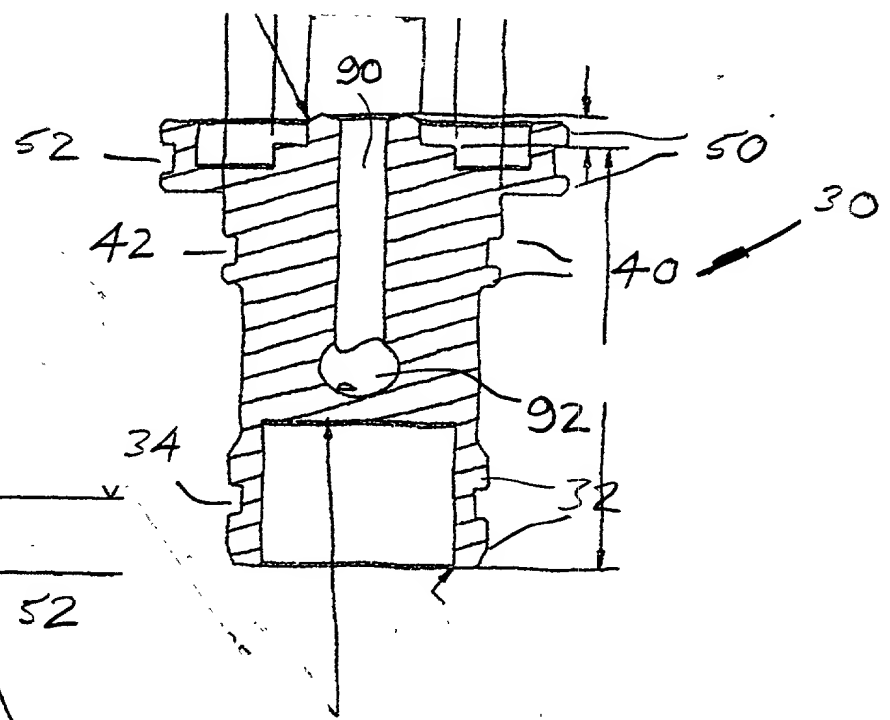


FIG. 8

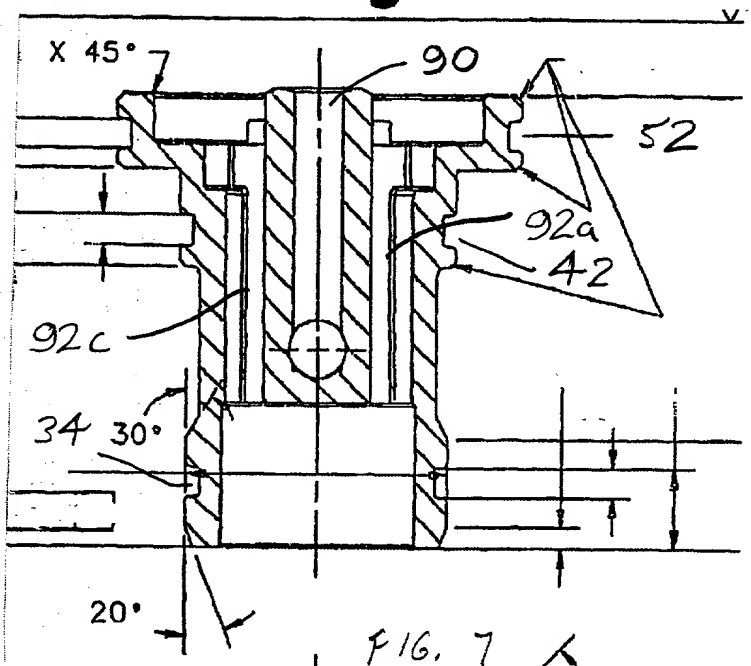


FIG. 7

668011-0/55460

DECLARATION FOR PATENT APPLICATION SOLE OR JOINT

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention titled:

Non-Metallic, Snap-Together Subassembly of Internal Double Check Valve

the specification of which is attached hereto.

I HEREBY STATE THAT I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS.

I ACKNOWLEDGE THE DUTY TO DISCLOSE INFORMATION THAT IS MATERIAL TO THE PATENTABILITY OF THIS APPLICATION IN ACCORDANCE WITH TITLE 37, CODE OF FEDERAL REGULATIONS, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

<input type="checkbox"/>	<input type="checkbox"/>
Yes	No

_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)

<input type="checkbox"/>	<input type="checkbox"/>
Yes	No

_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)

<input type="checkbox"/>	<input type="checkbox"/>
Yes	No

_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States applications listed below and, INSOFAR AS THE SUBJECT MATTER OF EACH OF THE CLAIMS OF THIS APPLICATION IS NOT DISCLOSED IN THE PRIOR UNITED STATES APPLICATION IN THE MANNER PROVIDED BY THE FIRST PARAGRAPH OF TITLE 35, UNITED STATES CODE, §112, I ACKNOWLEDGE THE DUTY TO DISCLOSE MATERIAL INFORMATION AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, §1.56(a) WHICH OCCURRED BETWEEN THE FILING DATE OF THE PRIOR APPLICATION AND THE NATIONAL OR PCT INTERNATIONAL FILING DATE OF THIS APPLICATION:

**

_____	_____	_____
(Application Serial Number)	(Filing Date)	(STATUS: Patented, Pending, Abandoned)

_____	_____	_____
(Application Serial Number)	(Filing Date)	(STATUS: Patented, Pending, Abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected herewith (List name and registration number).

(LIST SENIOR PATENT COUNSEL AND ATTORNEY HANDLING CASE WITH PATENT OFFICE REGISTRATION NUMBERS.)

Paul L. Marshall	John Donofrio	Roger Criss
_____	_____	_____
Name	Name	Name
31,178	32,339	25,570
_____	_____	_____
Registration Number	Registration Number	Registration Number

SEND CORRESPONDENCE TO:

Paul L. Marshall
AlliedSignal Truck Brake Systems Company
901 Cleveland Street
Elyria, Ohio 44035

DIRECT TELEPHONE CALLS TO:

248-362-7053

DECLARATION FOR PATENT APPLICATION—SOLE OR JOINT (Continued)

Attorney's Docket No.: 591-99-023 – Page 2

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

FULL NAME OF SOLE OR FIRST INVENTOR James M. KubikINVENTOR'S SIGNATURE *James M. Kubik*Date 10/14/99RESIDENCE Avon Lake, Lorain County, OhioCITIZENSHIP USAPOST OFFICE ADDRESS 389 Seneca CourtAvon Lake, Ohio 44012FULL NAME OF SECOND JOINT INVENTOR Carolyn S. DuteINVENTOR'S SIGNATURE *Carolyn S. Dute*Date 10/14/99RESIDENCE Spencer, Medina County, OhioCITIZENSHIP USAPOST OFFICE ADDRESS 5530 Hunter RoadSpencer, Ohio 44275

FULL NAME OF THIRD JOINT INVENTOR _____

INVENTOR'S SIGNATURE _____

Date _____

RESIDENCE _____

CITIZENSHIP _____

POST OFFICE ADDRESS _____

FULL NAME OF FOURTH JOINT INVENTOR _____

INVENTOR'S SIGNATURE _____

Date _____

RESIDENCE _____

CITIZENSHIP _____

POST OFFICE ADDRESS _____

FULL NAME OF FIFTH JOINT INVENTOR _____

INVENTOR'S SIGNATURE _____

Date _____

RESIDENCE _____

CITIZENSHIP _____

POST OFFICE ADDRESS _____